




**FABRISORB**<sup>TM</sup>

Juninin, "MINING

### FABRISORB TO SERVICE OF THE PROPERTY OF THE PR

- → ACOUSTICAL WALL PANELS
- → ACOUSTICAL CEILING CLOUDS
- → ACOUSTICAL CEILING BAFFLES
- → ACOUSTICAL DESIGNER PANELS

Fabrisorb decorative sound absorbing panels are great for offices, schools, meeting rooms, music rooms, hotels, auditoriums, recording studios, broadcasting studios. These acoustic wall panels are perfect for any space where good speech privacy or speech intelligibility is important.

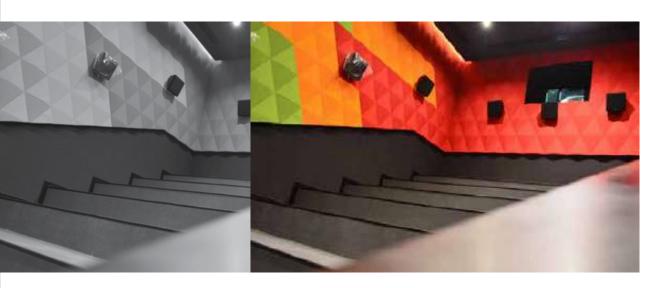

### **FEATURES**



- Aesthetically pleasing
- High sound absorption performance
- Available with various edges and colours
- Fire resistant
- Environmentally friendly
- Humidity resistance
- Easily cleanable and can be vacuumed
- Easy to apply

## О 4

# FABRISORB ACOUSTICAL WALL PANELS

These are acoustically enhanced wall panels designed for all kinds of walls that improve the acoustic qualities of all spaces. These edge hardened acoustic panels comes without an internal frame making it extremely lightweight and perfect for all mounting techniques. The construction and integrity of frameless panels starts with a rigid fibre glass core which is extremely effective at absorbing sound. The fabric is evenly and tightly stretched across the core to avoid any kind of wrinkle or such deformation issues. Borders are also taken care of to form impact resistant and hard edges.

#### APPLICATIONS


Fabrisorb decorative fabric wrapped acoustic panels provide high-performance noise and reverberation reduction. From movie theaters to home music production studios, Fabrisorb wall panels help you create a space that is both visually and acoustically pleasing. The choice of fabrics makes them look appealing at the same time they optimize the acoustics requirements of the space such as classrooms, auditoriums, multi-purpose halls, office spaces etc.



### PRODUCT SPECIFICATION


Core	96kg/m3 Fiberglass Insulation with tissue facing
Thickness (mm)	20 - 25 - 40 - 50 mm, custom thickness are also available
Sizes (mm)	600 x 600 - 600 x 1200 - 1200 x 1200 - 1200 x 2400 & many more custom sizes
Acoustic Properties	NRC 0.75 - 1.15 ( varies with thickness and mounting)
Edges	Concealed and Hardened
Edge Finishes	Square / Radius / Bevel / Half Bevel
Facing	Fabric
Colors	Wide range of standard colors. Also available in custom colors
Flammability	Tested as per ASTM E84 and classified as Class A
Mounting Type	Type A,E200 & E400
Installation	Adhesive, Velcro, Impaling clips, Z clips etc

Sound Absorption Coefficients								
Thickness	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC	
20mm	0.07	0.32	0.75	0.99	0.93	0.85	0.75	
25mm	0.09	0.40	0.91	0.97	0.92	0.86	0.80	
40mm	0.17	0.82	0.94	0.98	0.88	0.83	0.90	
50mm	0.22	0.81	1.24	1.30	1.21	1.16	1.15	

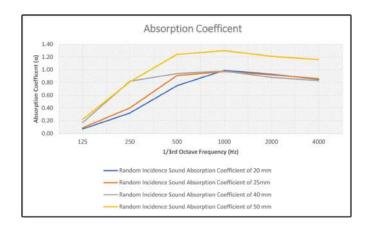






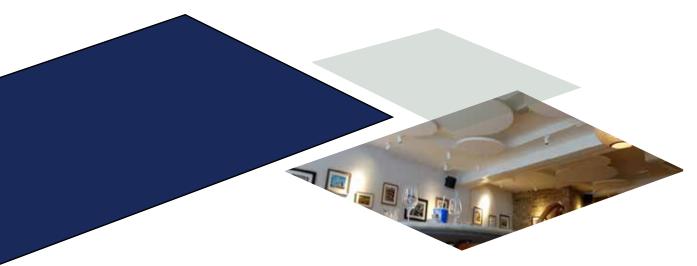

### PRODUCT SPECIFICATION

Core	96kg/m³ fiberglass insulation with tissue facing
Thickness (mm)	25mm, 40mm, 50mm and custom thickness also available
Sizes (mm)	600 x 600, 600 x 1200, 1200 x 1200 and many more custom sizes
Acoustic Properties	NRC 0.75 - 1.15 (varies with thickness and mounting)
Edges	Concealed and Hardened
Edge Finishes	Square
Facing	Fabric
Colors	Wide range of Standard colors, also available in custom colors
Flammability	Tested as per ASTM E84 and classified as Class A
Mounting Type	Type J
Installation	Adhesives, Suspention Kit, Aluminium Channels etc

Sound Absorption Coefficients								
Thickness 125Hz 250Hz 500Hz 1KHz 2KHz 4KHz Sabir								
25mm	4.55	6.20	8.42	12.83	14.35	14.28	10.45	
50mm	4.48	8.00	13.20	17.93	16.98	16.35	14.02	

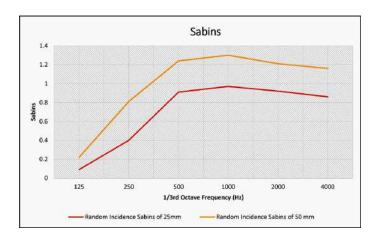



### FABRISORB TM



THESE ACOUSTICALLY ENHANCED BAFFLES IMPROVES THE ACOUSTICS AND AESTHETICS OF THE SPACE AT THE SAME TIME. THEY FIND AT

MOST IMPORTANCE WHERE WALL TREATMENT IS A CONCERN. THEY FIND GREATER


APPLICATIONS IN CAFETERIAS, HALLS AND STADIUMS.



#### >>> APPLICATIONS


Fabrisorb acoustic baffles or clouds are generally dropped or suspended and are apt for spaces where accommodating more acoustic treatment in limited space is a concern. It will work perfectly in spaces such as open offices, swimming pools, multi-purpose halls, sports arena, restaurants, showrooms etc

SoundAbsorptionCoefficients								
Thickness 125Hz 250Hz 500Hz 1KHz 2KHz 4KHz Sabin								
25mm	4.55	6.20	8.42	12.83	14.35	14.28	10.45	
50mm	4.48	8.00	13.20	17.93	16.98	16.35	14.02	

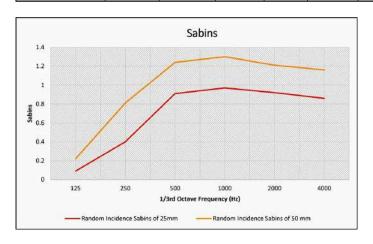

### FABRISORB<sup>TM</sup>





### PRODUCT SPECIFICATION

Core	96kg/m3 Fiberglass Insulation with tissue facing
Thickness (mm)	40 - 50 mm, custom thickness are also available
Sizes (mm)	600 x 600 - 600 x 1200 - 1200 x 1200 & 600 x 2400 many more custom sizes
Acoustic Properties	NRC 0.90 - 1.15 (varies with thickness and mounting)
Edges	Concealed and Hardened
Edge Finishes	Square
Facing	Fabric
Colors	Wide range of standard colors. Also available in custom colors
Hammability	Tested as per ASTM E84 and classified as Class A
Installation	Twist springs, Wire Clips etc.






### FABRISORB ACOUSTICAL

These acoustically decorative designer panels are designed for all spaces where aesthetics along with reflected noise from walls are a concern. They also add a 3D effect to the whole space which improves the overall looks of the space. They are highly recommended for spaces such as cinemas, schools, halls, museums.

DESIGNER PANELS

#### **>>>** APPLICATIONS

Fabrisorb designer panels are custom made on client requirements in varying thickness and colour choices. These can be a perfect multiuse panel which will treat the spaces acoustically and will give a pleasing aesthetic look. These panels are perfect for theatres, home cinemas, studios, meeting rooms, listening rooms etc.

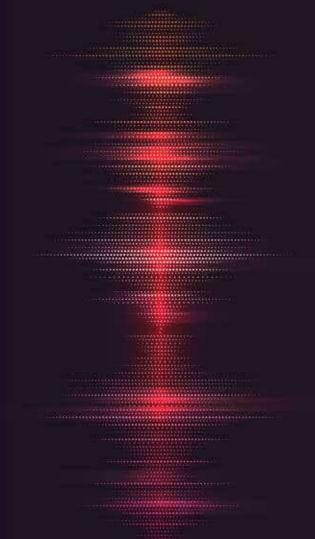




### PRODUCT SPECIFICATION


Core	96kg/m3 Fiberglass Insulation with tissue facing
Thickness (mm)	20mm - 150mm, custom thickness are also available
Sizes (mm)	600 x 600 - 600 x1200 & many more custom sizes
Acoustic Properties	NRC 0.75 - 1.15 (varies with thickness and mounting)
Edges	Concealed and Hardened
Edge Finishes	Square / Radius / Bevel / Half Bevel
Facing	Fabric
Colours	Wide range of standard colors. Also available in custom colors
Rammability	Tested as per ASTM E84 and classified as Class A
Mounting Type	Type A,E200 & E400
Installation	Adhesive, Velcro, Impaling clips, Z clips etc

Sound Absorption Coefficients								
Thickness	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC	
20mm	0.07	0.32	0.75	0.99	0.93	0.85	0.75	
25mm	0.09	0.40	0.91	0.97	0.92	0.86	0.80	
40mm	0.17	0.82	0.94	0.98	0.88	0.83	0.90	
50mm	0.22	0.81	1.24	1.30	1.21	1.16	1.15	







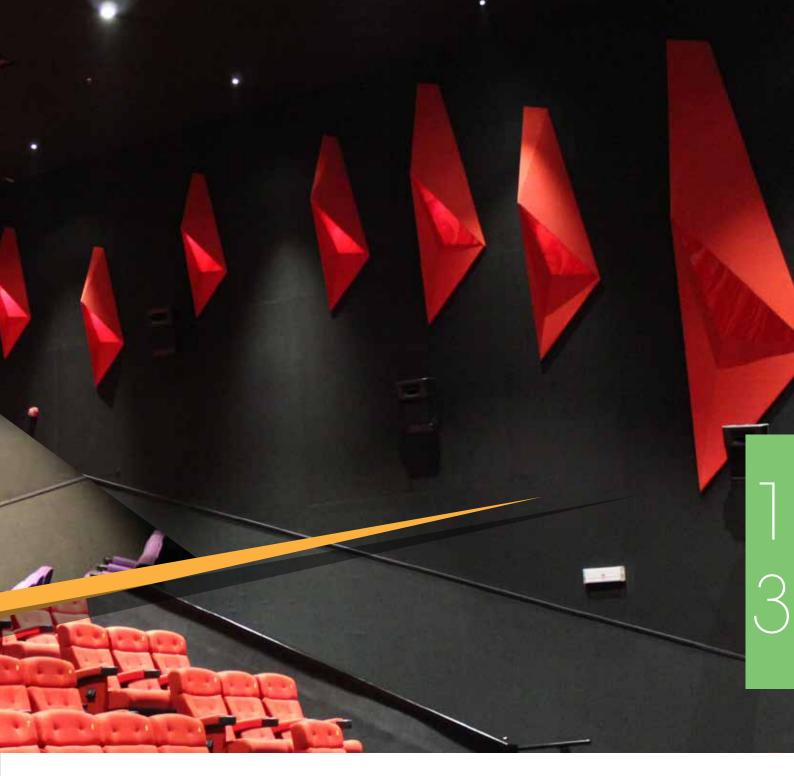















ACOUSTICAL SURFACES INDUSTRIES INDIA
ACOUSTICAL SURFACES IND.
Coimbatore - 641048
Tamil Nadu, INDIA.
Tel: +91-827 733 1000
www.acousticalsurfaces.in

USA
ACOUSTICAL SURFACES INC.
123 Columbia Court North
Suite 201 Chaska, MN 55318, USA
Tel: +1-952 448 5300
www.acousticalsurfaces.com